


# Metric Hydraulic Powered Internal Rota-Shaft

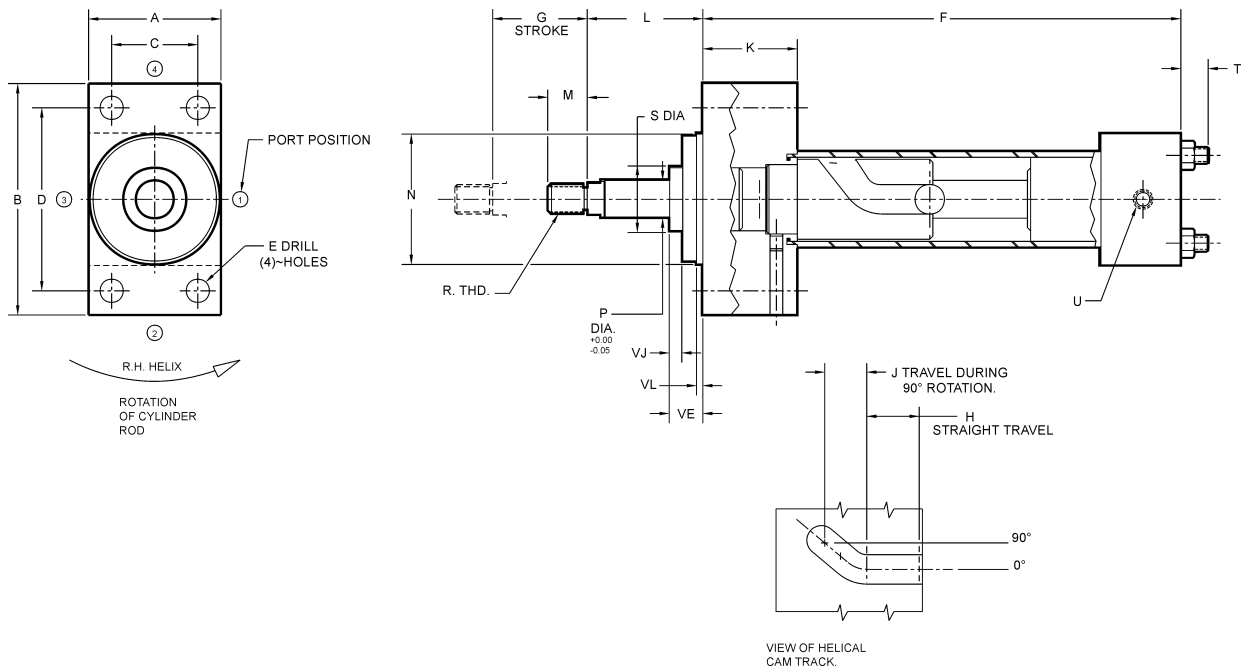

RIGHT HAND SHOWN, LEFT HAND ALSO STANDARD

HYDRAULIC POWERED																							
CAD FILE NAME	PART NUMBER	CYLINDER BORE	DIMENSIONS																				
			A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	VE	VJ	VL
EMH1840H	EMH-18401-(R/L)	40	63.0	110.0	41.0	87.0	11.0	227.5	45.0	25.0	20.0	45.0	55.0	18.0	62.0	18.0	M14 x 1.50	30.0	13.0	(3/8) BSP/G	16.0	6.0	3.0
EMH2250H	EMH-22501-(R/L)	50	75.0	130.0	52.0	105.0	14.0	234.0	50.0	25.0	25.0	45.0	55.0	22.0	74.0	22.0	M16 x 1.50	34.0	17.0	(1/2) BSP/G	22.0	6.0	4.0
EMH2863H	EMH-28631-(R/L)	63	90.0	145.0	65.0	117.0	14.0	251.0	55.0	25.0	30.0	45.0	55.0	28.0	75.0	28.0	M20 x 1.50	42.0	17.0	(1/2) BSP/G	22.0	6.0	4.0

ISO 6020/2 HYDRAULIC CYLINDER, MAXIMUM RECOMMENDED OPERATING PRESSURE = 210 bar  
 MAX VELOCITY = 300 cm/min